


SPECIFICATIONS



Model Number: CD24B3
Part Number: 19031573A

Version: 01
Sep 10, 2017

Mechanical Drawing:

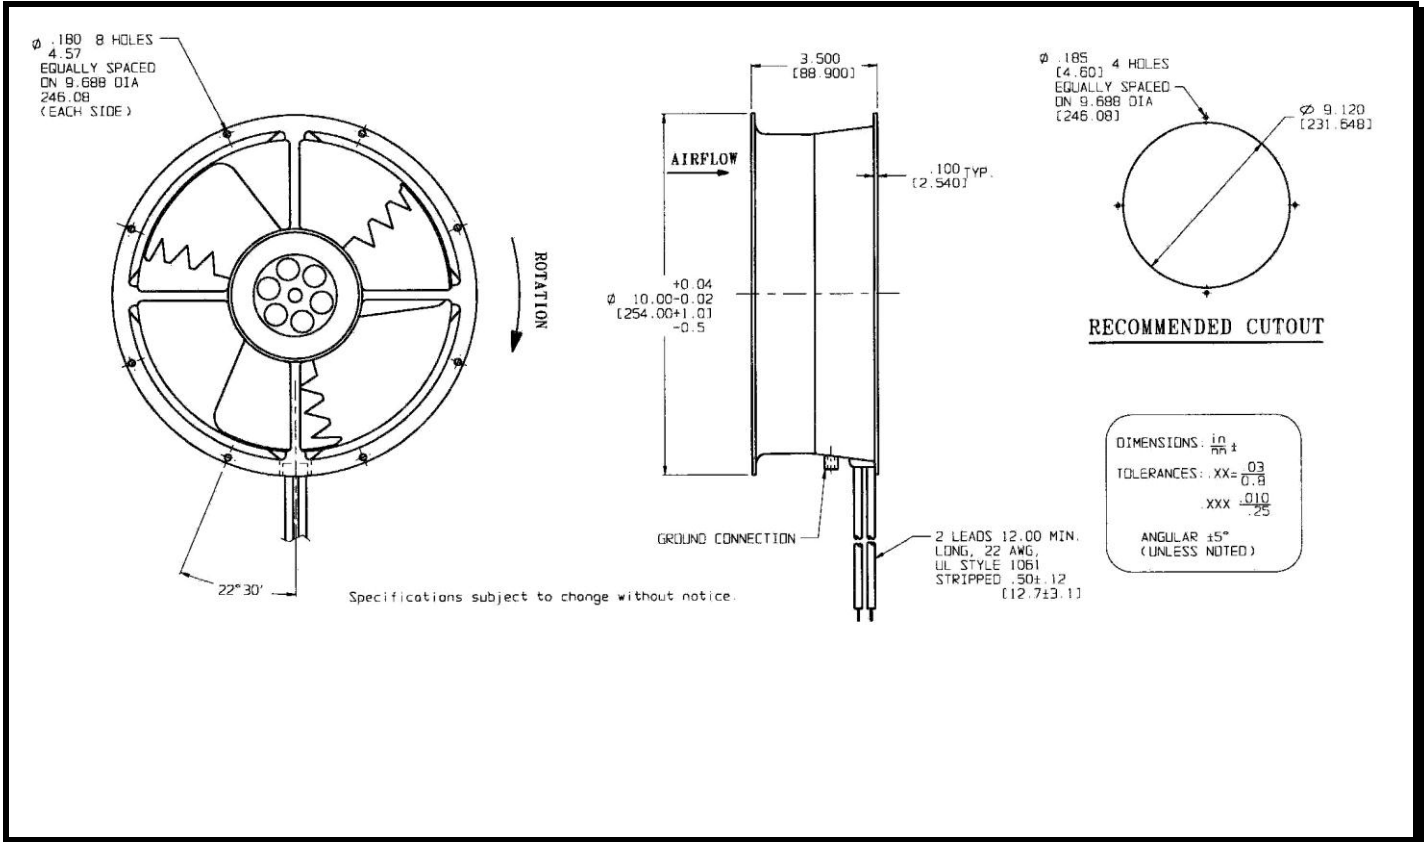

Motor:

Nominal Voltage = 24 vdc
Operating Voltage Range = 12-28 vdc
Nominal Running Current = 1.20 amps
Locked Rotor Current = 2.00 amps
Running Power = 28.8 watts
Average Speed = 1650 rpm
Bearings = Ball
Air Flow = 548 cfm
Acoustic = 49.1 dBA

Construction:

Venturi: Die-Cast Aluminum, Black
Propeller: Plastic, Black, UL 94V-0

Agency Approvals:

UL, CUL, CE

Life Expectancy:

This fan is designed for continuous duty life of 65,000 hours at 40°C.

Additional Features:

Brushless DC Motor
Locked Rotor Protection
Polarity Protected
Automatic Restart Capability
Operating Temperature: -10°C to 70°C
Storage Temperature: -40°C to 85°C

Termination:

12" Lead wires, 22 AWG, UL 1061

Red = Power (+)

Black = Return (-)

PQ Curve:

