

SPECIFICATIONS


(RoHS Compliant)

Model Number: ST12B3
Part Number: 19030615A

Version: 01
Nov 10, 2017



Mechanical Drawing:

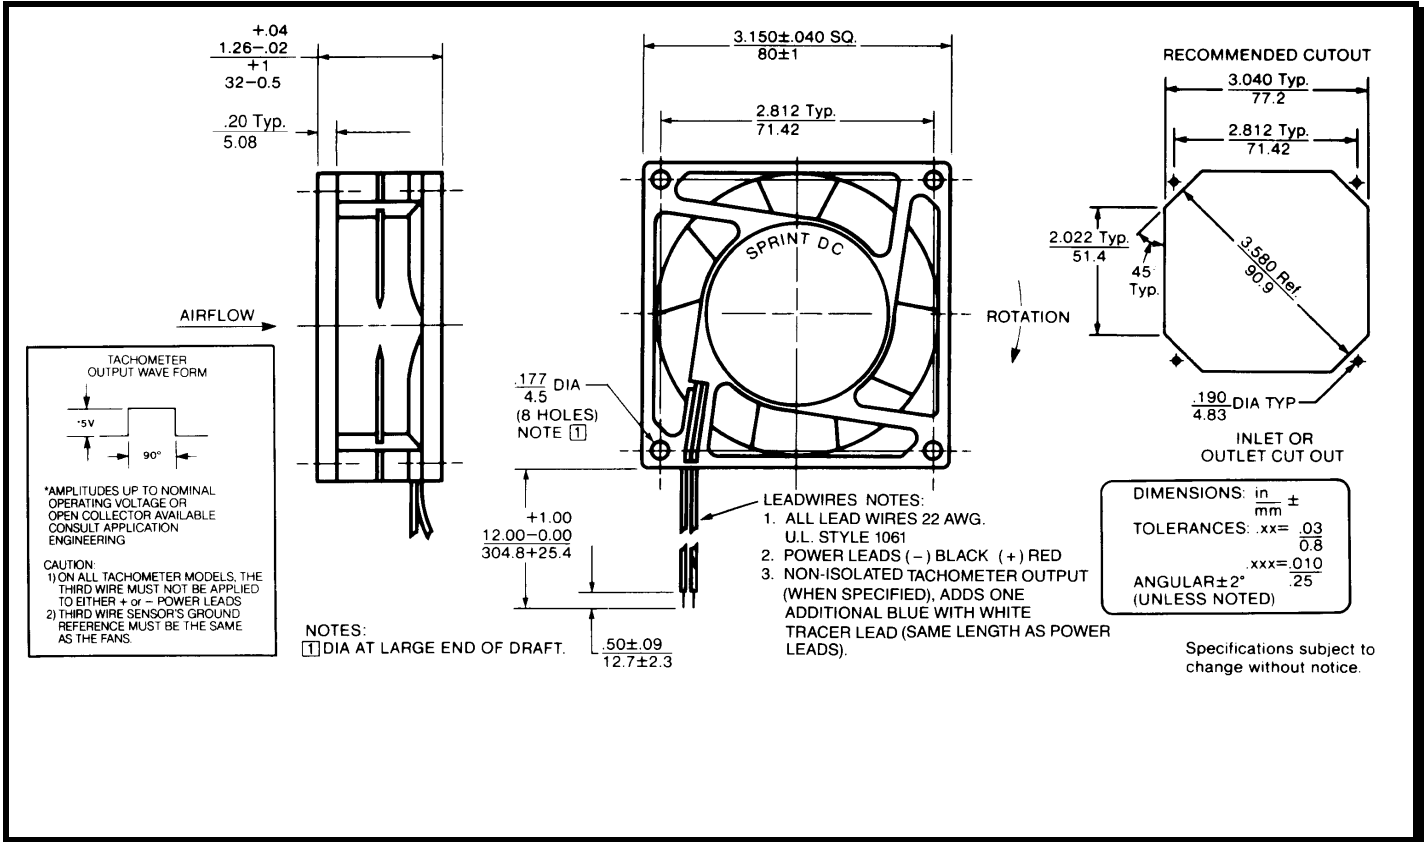

Motor:

Nominal Voltage = 12 vdc
Operating Voltage Range = 6-14 vdc
Nominal Running Current = 0.280 amps
Max. Locked Rotor Current = 0.700 amps
Running Power = 3.4 watts
Average Speed = 3400 RPM
Bearings = Ball
Air Flow = 32 CFM
Acoustic = 40.9 dBA

Construction:

Venturi: Plastic, Black, UL 94V-0
Propeller: Plastic, Black, UL 94V-0

Life Expectancy:

This fan is designed for continuous duty life of 45,000 hours at 70°C.

Additional Features:

Brushless DC Motor
Automatic Restart Capability
Electronic Locked Rotor Protection
Polarity Protected
Operating Temperature: -10°C to 70°C
Storage Temperature: -40°C to 85°C

Termination:

12" Lead wires, 22 AWG, UL 1061
Red = Power
Black = Ground

Agencies:

UL, CUL, CE

PQ Curve:

