

# SPECIFICATIONS


(RoHS Compliant)



Model Number: TNE3A  
Part Number: 19020172A

Version: 02  
Apr 09, 2018

## Mechanical Drawing:

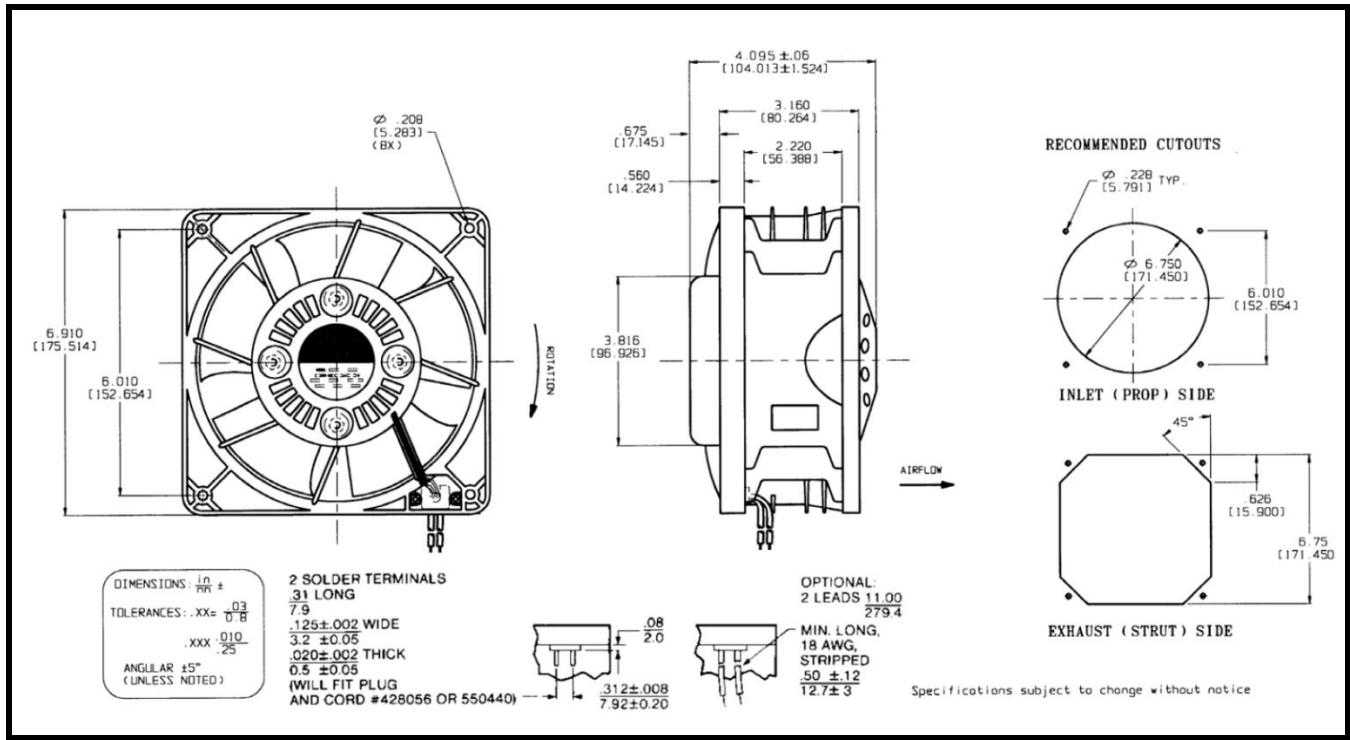

### Motor:

|                           |                    |
|---------------------------|--------------------|
| Nominal Voltage           | = 220/230 VAC      |
| Frequency                 | = 50 / 60 Hz       |
| Nominal Running Current   | = 0.22 / 0.25 Amps |
| Max. Locked Rotor Current | = 0.60 / 0.65 Amps |
| Running Power             | = 52 / 59 Watts    |
| Average Speed             | = 2820 / 3350 RPM  |
| Bearings                  | = Ball             |
| Air Flow                  | = 280 / 340 CFM    |
| Acoustic                  | = 61.6 / 65.4 dBA  |

### Construction:

Venturi: Plastic, Black, UL 94V-0  
Propeller & Cover: Plastic, Black, UL 94V-0

### Life Expectancy:

This fan is designed for continuous duty life of 45,000 hours at 70°C.

### Additional Features:

Permanent Split Capacitor  
Automatic Reset Thermal Protector  
Thermal Shutdown Protection  
Class B Insulation  
Operating Temperature: -10°C to 70°C  
Storage Temperature: -40°C to 85°C

### Termination:

2x0.12" Terminals

### Agency Approvals:

UL, CUL, CE

## PQ Curve:

