

# SPECIFICATIONS


(RoHS Compliant)



**Model Number:** TNE3C  
**Part Number:** 19020177A

**Version:** 02  
**Apr 09, 2018**

## Mechanical Drawing:

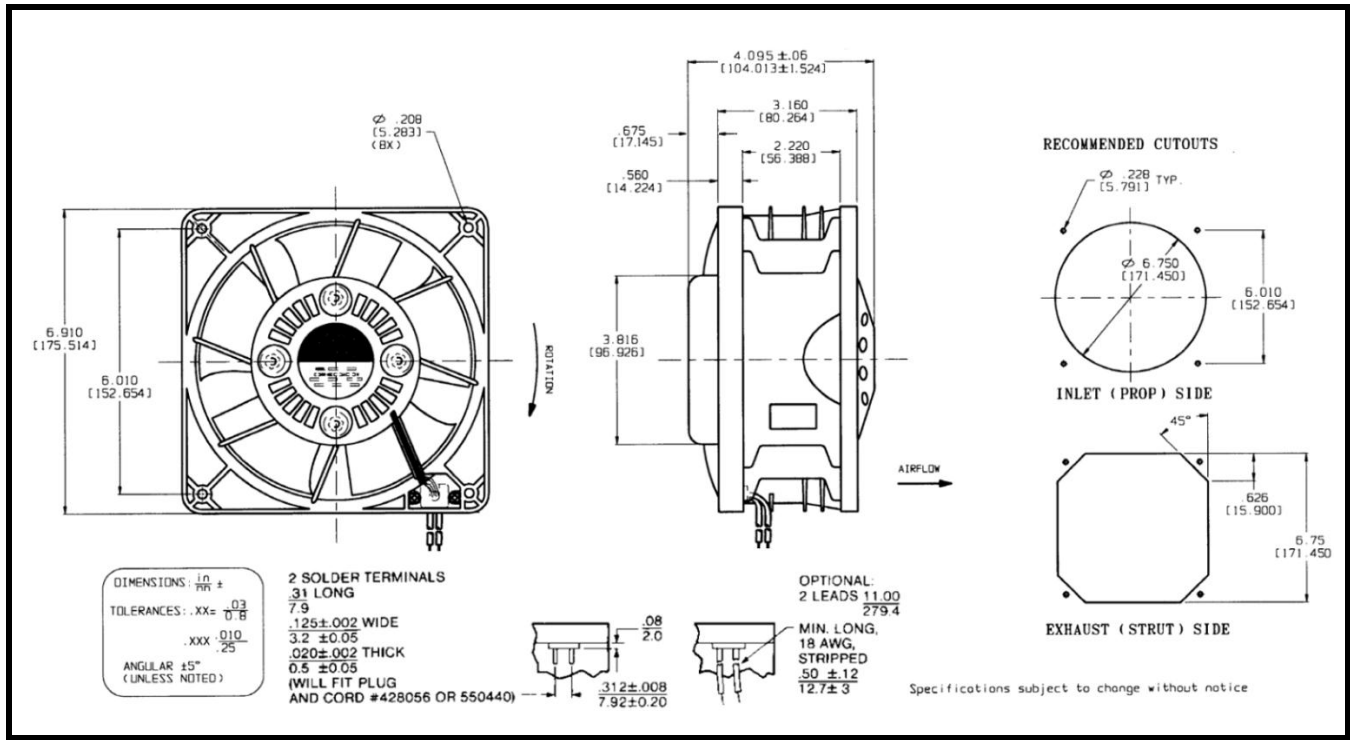

### Motor:

Nominal Voltage	= 220/230 VAC
Frequency	= 50 / 60 Hz
Nominal Running Current	= 0.22 / 0.25 Amps
Max. Locked Rotor Current	= 0.60 / 0.65 Amps
Running Power	= 52 / 59 Watts
Average Speed	= 2820 / 3350 RPM
Bearings	= Ball
Air Flow	= 280 / 340 CFM
Acoustic	= 61.6 / 65.4 dBA

### Construction:

Venturi: Plastic, Black, UL 94V-0  
Propeller & Cover: Plastic, Black, UL 94V-0

### Life Expectancy:

This fan is designed for continuous duty life of 45,000 hours at 60°C.

### Additional Features:

Permanent Split Capacitor  
Automatic Reset Thermal Protector  
Thermal Shutdown Protection  
Class B Insulation  
Operating Temperature: -10°C to 70°C  
Storage Temperature: -40°C to 85°C

### Termination:

12" Lead wires, 18 AWG, UL 1015

### Agency Approvals:

UL, CUL, CE

## PQ Curve:

