


SPECIFICATIONS



Model Number: WT24M3
Part Number: 19031104A

Version: 01
Jan 12, 2018

Mechanical Drawing:

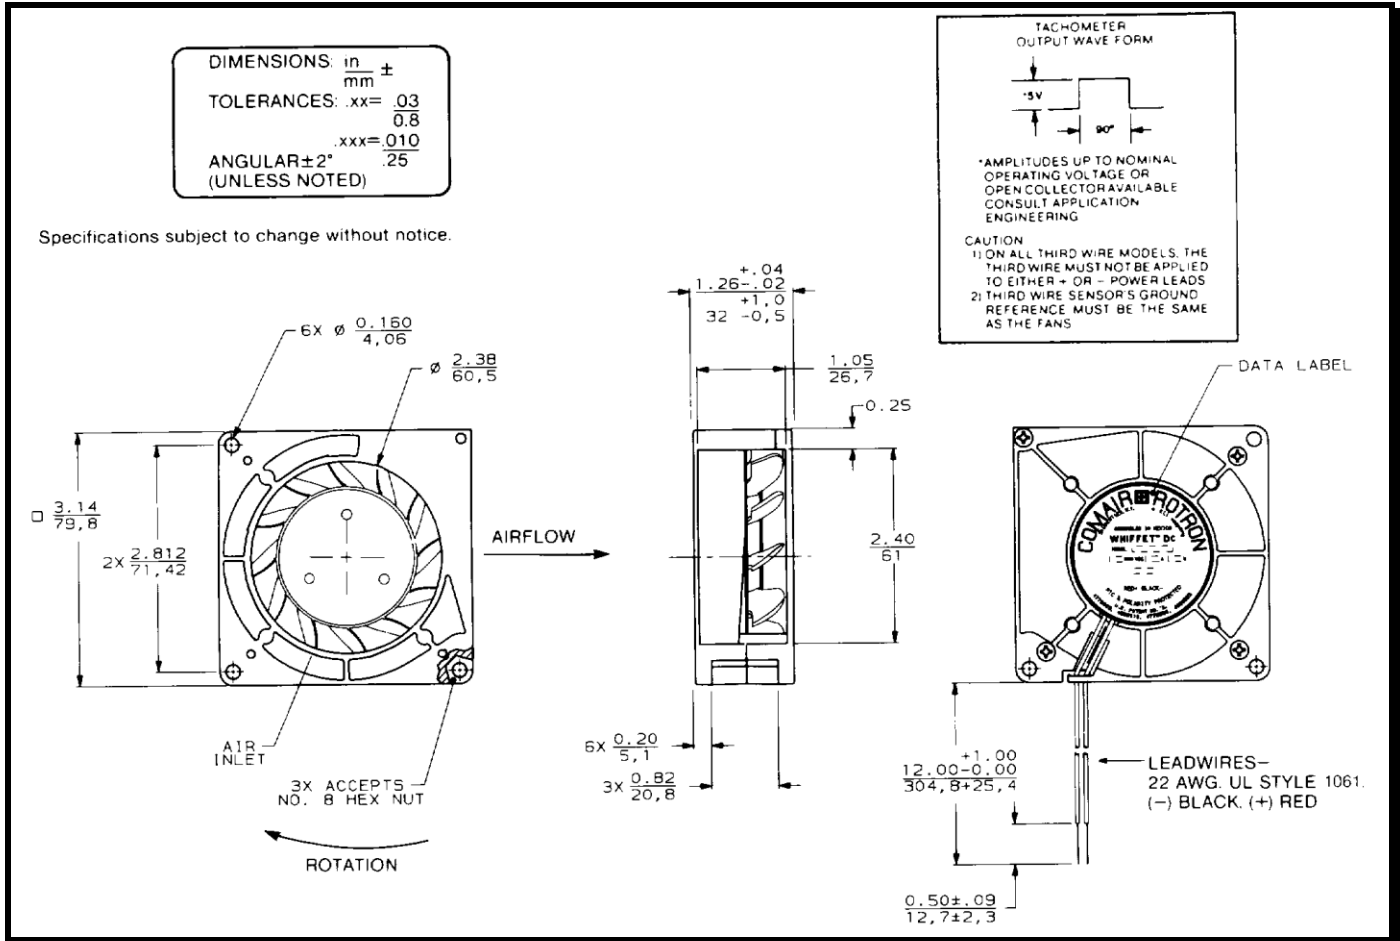

Motor:

Nominal Voltage = 24 vdc
Operating Voltage Range = 12 - 28 vdc
Nominal Running Current = 0.06 amps
Max. Locked Rotor Current = 0.20 amps
Running Power = 1.10 watts
Average Speed = 2300 RPM
Bearings = Ball
Air Flow = 8.6 CFM
Acoustic = 36.0 dBA

Construction:

Venturi: Plastic, Black, UL 94V-0
Propeller: Plastic, Black, UL 94V-0

Life Expectancy:

This fan is designed for continuous duty life of 55,000 hours at 70°C.

Additional Features:

Brushless DC Motor
Locked Rotor Protection
Reverse Polarity Protected
Automatic Restart Capability
Operating Temperature: -10°C to 70°C
Storage Temperature: -40°C to 85°C

Termination:

12" Lead wires, 22AWG, UL 1061
Red = (+) Fan Power
Black = (-) Fan Ground

Agency Approvals:

UL, CUL, CE

PQ Curve:

