



Comair Rotron Specification Sheet

Specification Date: Feb 27, 2018

Version: 01

COMAIR ROTRON PART NUMBER:

17000653A

COMAIR ROTRON MODEL NUMBER:

CREC2258-2800E1B

A.) MOTOR:

RATED VOLTAGE:	115VAC \pm 10%
OPERATING VOLTAGE RANGE:	103~126VAC
LOW-START VOLTAGE:	87VAC
RATED CURRENT:	0.58 Amps
OPERATING FREQUENCY:	50~60Hz
INPUT POWER:	45 Watts
RATED SPEED:	2800 RPM \pm 5% (At Free Delivery)
MOTOR TYPE:	Brushless EC
MOTOR PROTECTION:	By Integrated Circuit
LOCKED ROTORT PROTECTION:	IC protected
POLARITY PROTECTION:	Yes
AUTOMATIC RESTART CAPABILITY:	By Integrated Circuit
ROTATION:	Counter Clockwise when viewed from the impeller

B.) MECHANICAL

DIMENSIONS:	225mm x225mm x 80mm
WEIGHT:	1800g
BEARING TYPE:	Ball Bearings
VENTURI:	Die Cast magnesium alloy, ED coating and powder coating
PROPELLER:	Die Cast magnesium alloy, ED coating and powder coating





Comair Rotron Specification Sheet

Specification Date: Feb 27, 2018

Version: 01

D.) PERFORMANCE CHARACTERISTICS

AIR FLOW:


832 CFM \pm 5%
(Measuring at zero static pressure)

STATIC PRESSURE:

1.00" Inches of H₂O
(Measuring at zero airflow)

ACOUSTIC LEVEL:

65 dBA Max. at MAX. speed
(Measured via Freely Suspended at 1 meter)

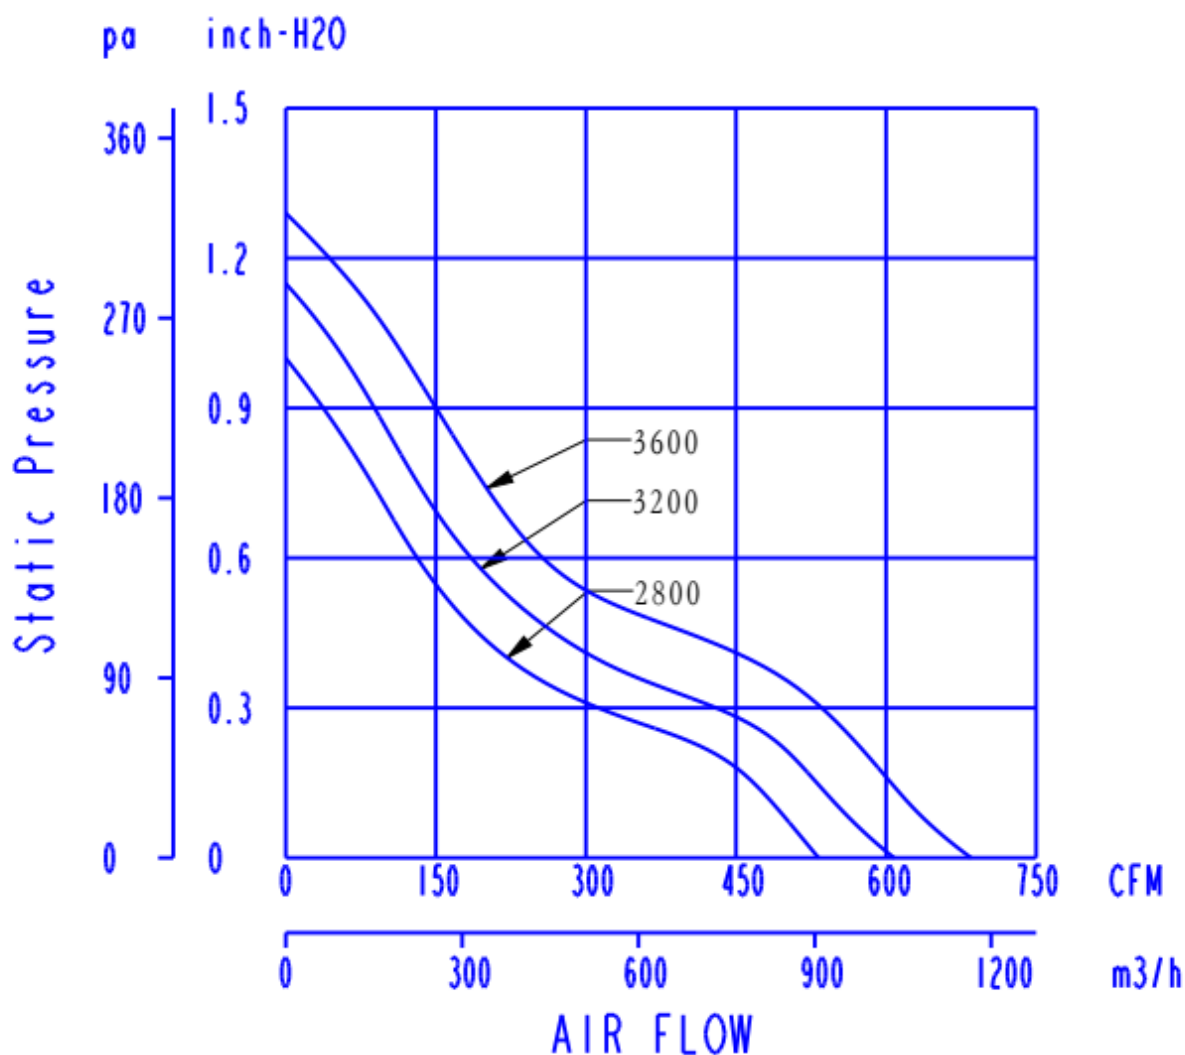



Comair Rotron Specification Sheet

Specification Date: Feb 27, 2018

Version: 01

E.) TERMINATION

Terminal connection:

Suit with terminal block

Blue = Neutral wire

Brown = Live wire

Yellow/Green = Ground wire

F.) RELIABILITY

Bearing type	Temperature	Hours
Ball bearing	20°C	60,000
	40°C	50,000
	60°C	40,000
	90°C	20,000

G.) SAFETY

UL, CUL, CE

H.) FLAMMABILITY

The fan including all components meets a UL94V-0 rating or better.