

# SPECIFICATIONS


(RoHS Compliant)

**Model Number:** GL12B4  
**Part Number:** 19031074A

**Version:** 01  
**Jan 18, 2018**



## Mechanical Drawing:

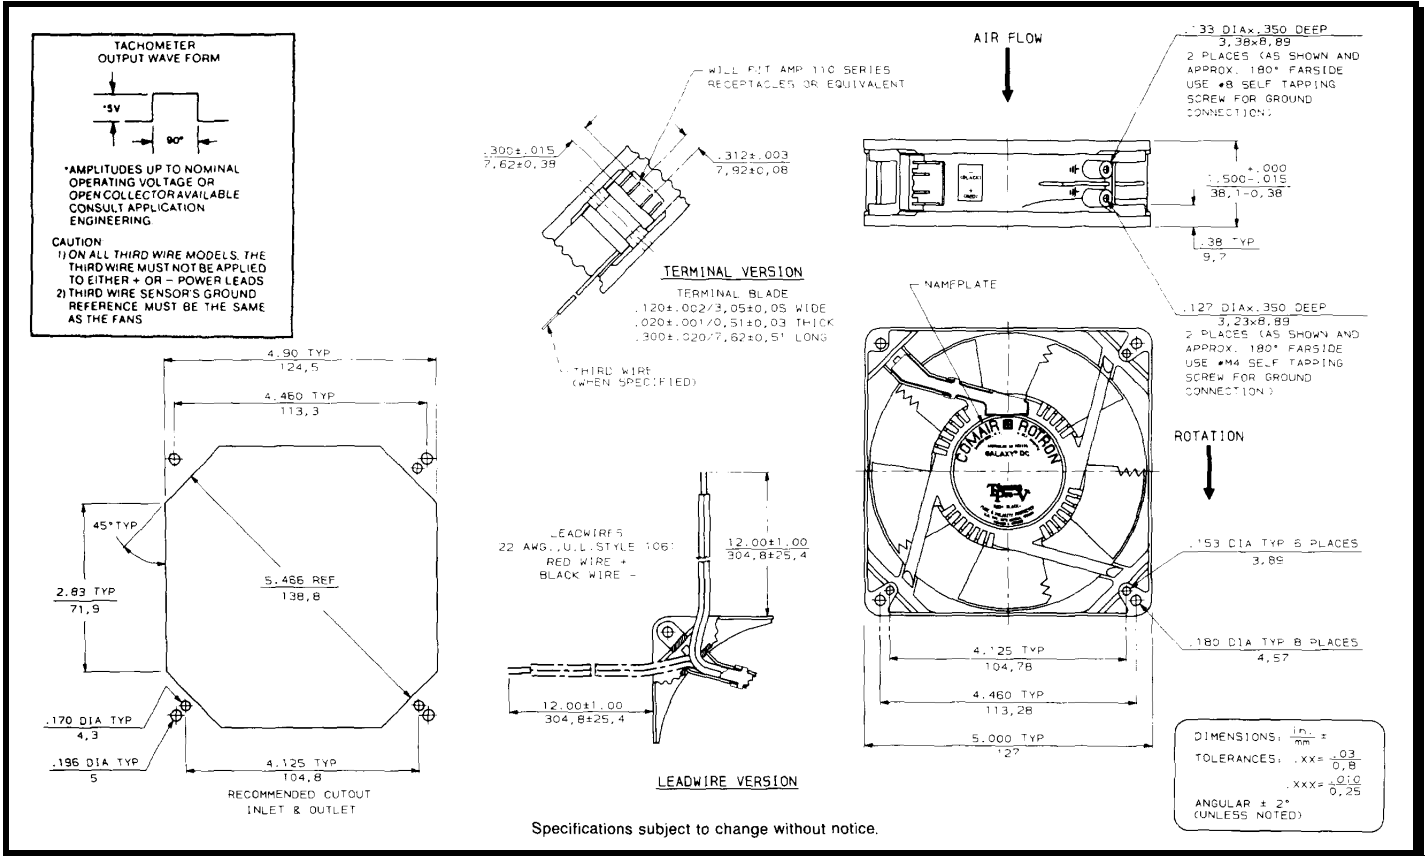

### Motor:

Nominal Voltage	= 12 vdc
Operating Voltage Range	= 6 - 14 vdc
Nominal Running Current	= 1.30 amps
Locked Rotor Current	= 3.00 amps
Running Power	= 15.6 watts
Average Speed	= 3300 rpm
Bearings	= Ball
Air Flow	= 150 CFM
Acoustic	= 53.6 dBA

### Construction:

Venturi: Die Cast Zinc, Black  
 Propeller: Plastic, Black, UL 94V-0

### Life Expectancy:

This fan is designed for continuous duty life of 60,000 hours at 70°C.

### Additional Features:

Brushless DC Motor  
 Polarity Protected  
 Locked Rotor Protection  
 Automatic Restart Capability  
 Operating Temperature -10°C to 70°C  
 Storage Temperature -40 °C to 85°C

### Termination:

2x0.120" wide Terminals

### Agency Approvals:

UL, CUL, CE

PQ Curve:

