

SPECIFICATIONS


(RoHS Compliant)



Model Number: PQ24S4H
Part Number: 19031397A

Ver:01
Jan 18, 2018

Mechanical Drawing:

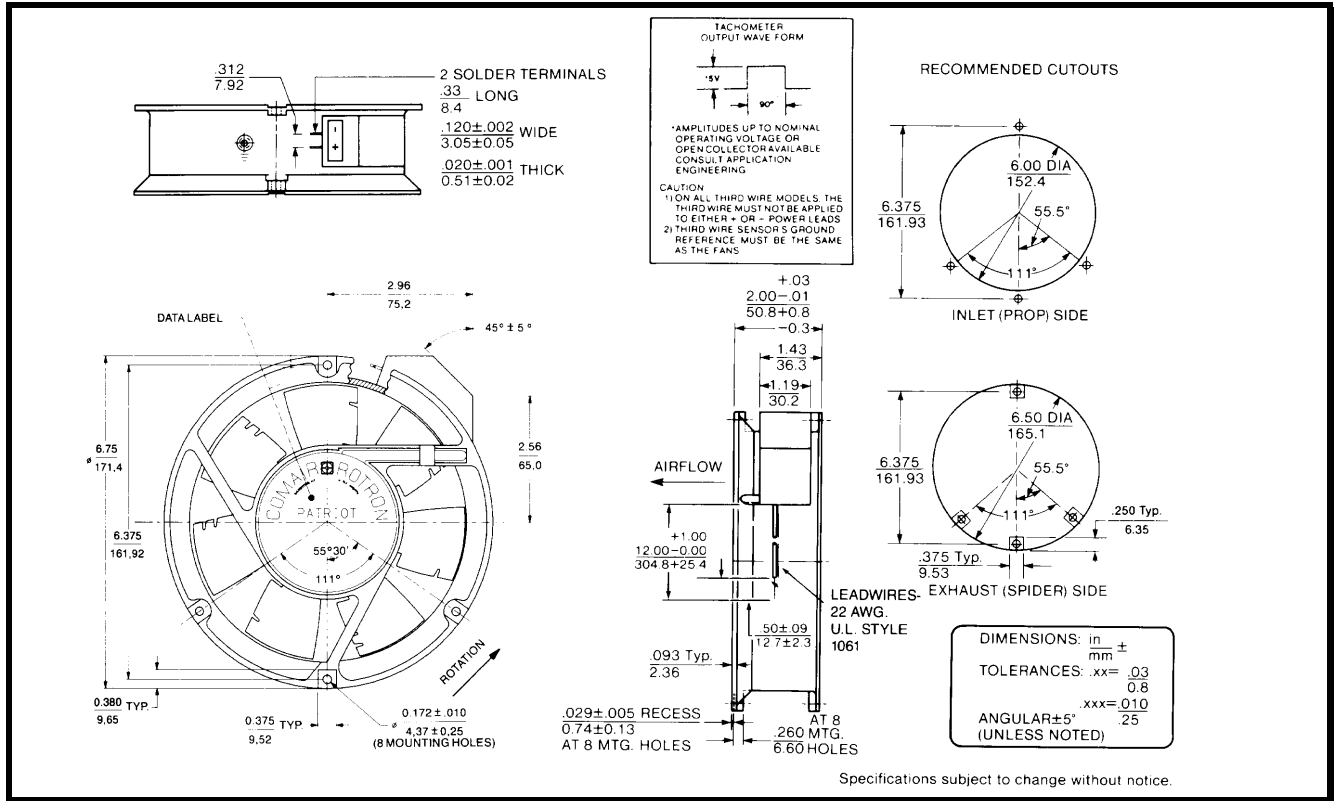

Motor (Full Speed):

Nominal Voltage = 24 vdc
 Operating Voltage Range = 12 - 28 vdc
 Nominal Running Current = 1.00 amps
 Locked Rotor Current = 1.55 amps
 Running Power = 24 watts
 Average Speed = 3425 RPM
 Bearings = Ball
 Air Flow = 235 CFM
 Acoustic = 51.2 dBA

Construction:

Venturi: Single Piece, Die-Cast Aluminum, Black
 Propeller: Polycarbonate, Black, UL 94V-0

Agency Approvals:

UL, CUL, CE

Life Expectancy:

This fan is designed for continuous duty life of 75,000 hours at 40°C

Additional Features:

Brushless DC Motor
 Polarity Protected
 Locked Rotor Protection
 Automatic Restart Capability
 Operating Temperature: -10°C to 70°C
 Storage Temperature: -40°C to 85°C
 Thermal Speed Control

Termination:

PTC on 36" zip cord
 2 Terminals- fan power

PQ Curve:

