

SPECIFICATIONS


RoHS

Model Number: SU2B5
Part Number: 19028410A

Version: 01
Nov 07, 2022



Mechanical Drawing:

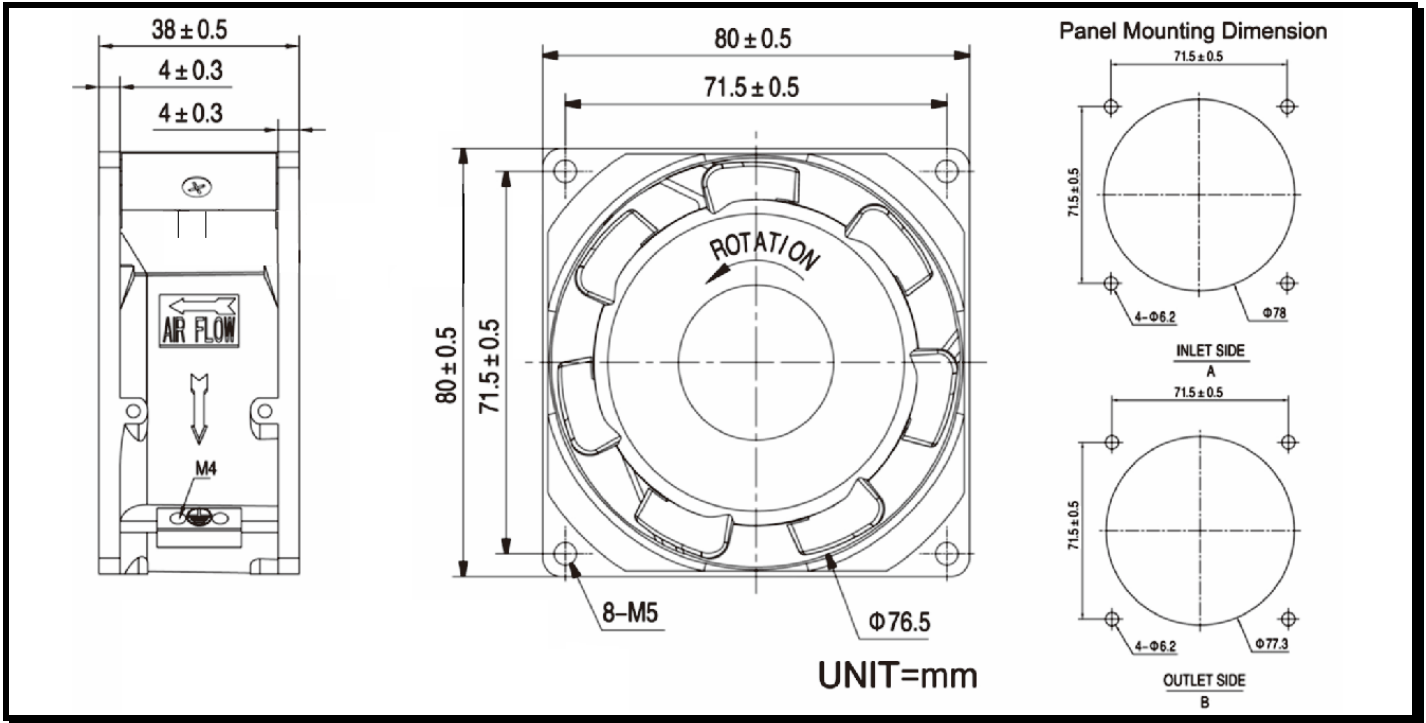

Motor:

Normal Voltage = 115 VAC
Operating Voltage Range = 99~121VAC
Operating Frequency = 50/60Hz
Rated Current = 0.14/0.13A
Input Power = 15/13Watt
Average Speed = 2800/3200RPM
Bearings = Ball
Airflow = 24/31CFM
(Measuring at zero static pressure)
Static Pressure = 0.13/0.17" H₂O
(Measuring at zero air flow)
Noise Level = 30/32 dB(A)
Net Weight = 260 gram.

Construction:

Venturi: High quality magnesium alloy die-casting frame with ED coating and powder coating, Black.
Propeller: Magnesium alloy with ED coating, Black

Life Expectancy:

This fan is designed for continuous duty life of 83,000 hours at 40°C

Additional Features:

Insulation Resistance: 100MΩ or more at 500 V megger.
Dielectric strength: 2 seconds at 1800 VAC/ 50-60 Hz.
Thermal Shock: Test per MIL-STD-202F, method 107G, condition D.
Operating Temperature: -10°C to 70°C
Storage Temperature: -40°C to 85°C

Termination:

2x0.12" Wide Terminals

Agency Approvals:

UL, CUL, CE

PQ Curve:

